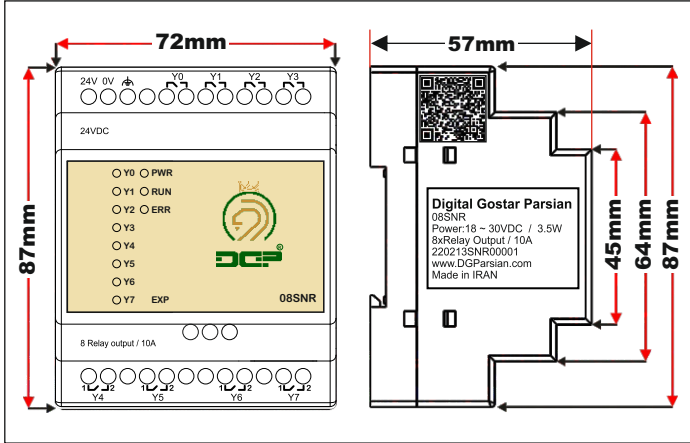
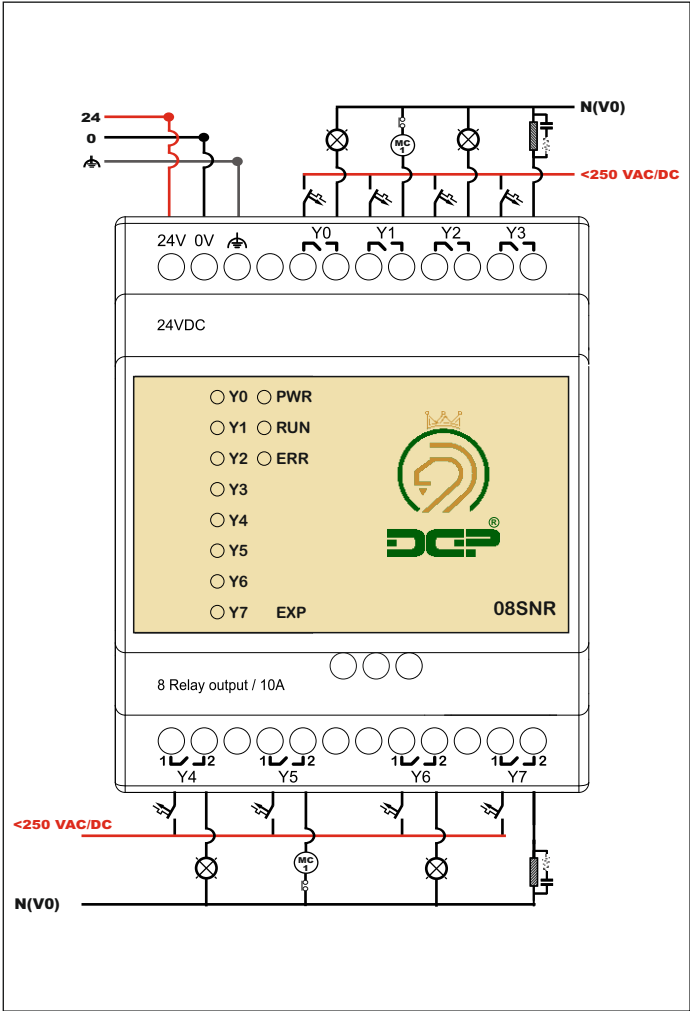




Input / Output	
Input voltage	24 VDC (20.5 ~ 28.5) - single common port input
Power consumption	2 W
Output No.	Y0 ~ Y5
Working voltage	250VAC, < 30VDC
Output Current	10 mA
Response Time(On,Off)	Approx. 10ms



Description	Product plate inserting information	Line										
By scanning the barcode, certain information such as website address, email address and phone number will be provided to you.	 QR Code	1										
EXP manufacturer	Digital Gostar Parsian	2										
EXP model	08SNR	3										
Product's permissible voltage limits/Power consumption	Power: 18 ~ 30V DC / 3W	4										
8 Relay output/10A	8xRelay Output 10A	5										
1.Production year 2.Production month 3.Production day 4.EXP model 5.The number of the manufactured EXP	220213SNR00001 <table><tr><td>22</td><td>02</td><td>13</td><td>SNR</td><td>00001</td></tr><tr><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td></tr></table>	22	02	13	SNR	00001	1	2	3	4	5	6
22	02	13	SNR	00001								
1	2	3	4	5								
The original website of the EXP manufacturer	www.DGParsian.ir	7										
Manufactured in Iran	Made in Iran	8										



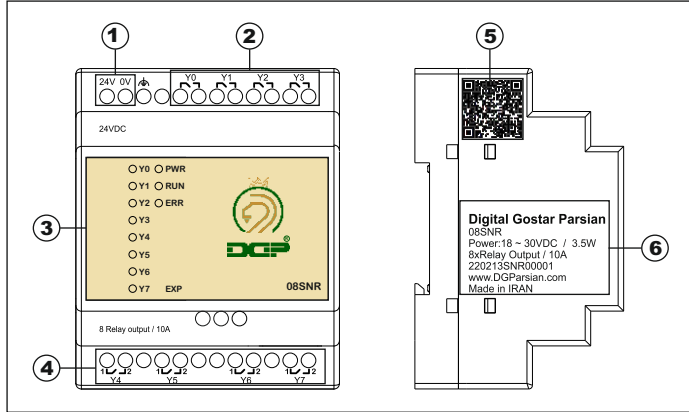
Usage of LED indicators

Description	LED
By activation of each output, the respecting LED turns on	Y0 ~ Y7
Stands for POWER and it turns on once the input voltage is applied	PWR
When the PLC is ready for operation, this LED turns on	RUN
Once the voltage violates the permissible limits, this LED turns on	ERR

Capable of connecting to all PLCs of green membrane
24V-DC input voltage
Count of relay outputs of 10A industrial: 8
LED displays the status of outputs

Warning:
Applying excessive force to terminal screws will damage the terminals.

Warranty:
* This product comes with a one-year replacement warranty and after-sales service.
* The warranty will be void if any of the following conditions occur:
- Applying voltage beyond the allowed limit
- Exceeding the allowed current from digital outputs
- Deformation caused by breakage, impact, and excessive heat
- Changing or replacing parts by unauthorized personnel
- Exposure to corrosive liquids and gases



1.Input voltage	2.Relay output
3.LED indicator	4.Relay output
5.QR-Code	6.EXP plate